




优钻地质材料供应有限公司 PRE-MAT DRILLING SUPPLIES PTE LTD

Co Reg. No. 199900213-K GST Reg. No. 19-9900213-K
No. 48 Toh Guan Road East #06-107 Enterprise Hub, Singapore 608586
Tel: (65) 6861 5323 Fax: (65) 6861 0882 Mobile: (65) 9633 1617 / (65) 9665 2712
Email: enquiry@premat.com.sg Website: <http://www.premat.com.sg>

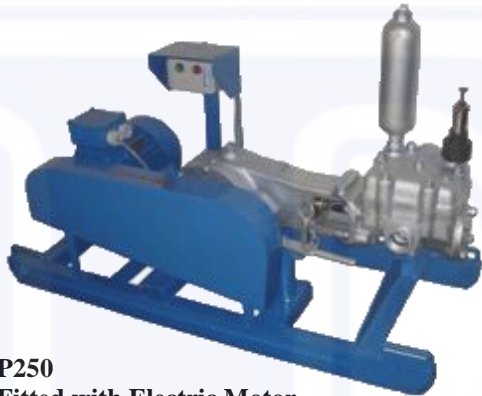

P250
Fitted with Electric Motor

Model	P250
Type	Single piston double acting with clutch and ball valve
Discharge Pressure	20 kg/cm ² (Max. continuous)
Displacement	85 l/m (18.5 gals/min)
Stroke	70 mm
Speed	200 rpm
Power	7HP diesel engine
Liner Bore Diameter	63.5 mm
Suction Port	51 mm (2" BSP)
Delivery Port	38 mm (1 1/2" BSP)
Transmission	Pulley and vee belt
Mounting	Skid mounted
Weight	60 kg (bare pump) 117 kg (with skid and belt cover) 198 kg (complete assembly with Yanmar TF70 engine)
Dimensions (with skid)	1500 mm (L) x 510 mm (W) x 800 mm (H)




PMG - 5A
Fitted with Diesel Engine

Model	PMG-5A		
Type	Single piston double acting		
Piston Diameter	45 mm	52 mm	68 mm
Discharge Capacity	28 l/min	40 l/min	70 l/min
Working pressure	60 kg/cm ²	40 kg/cm ²	20 kg/cm ²
Stroke Length	60 mm		
Number of stroke	165 rpm		
Inlet Diameter	38 mm (1 1/2")		
Outlet Diameter	32 mm (1 1/4")		
Dimensions	2040 mm (L) x 650 mm (W) x 710 mm (H)		
Weight(excluding power unit)	280 kg		
Power unit	3.7 – 4 kW-P 5-7 PS		



Model HP – 8 Hand Pump – Single Cylinder

Model	HP-8 Hand Pump – Single Cylinder
Piston Stroke	35 mm
Cylinder Diameter	120 mm
Discharge Capacity	8 l/min
Discharge Pressure	1 kg/cm ²
Discharge Bore	19 mm
Suction Bore	25 mm
Power System	Hand Feed
Weight	28 kg

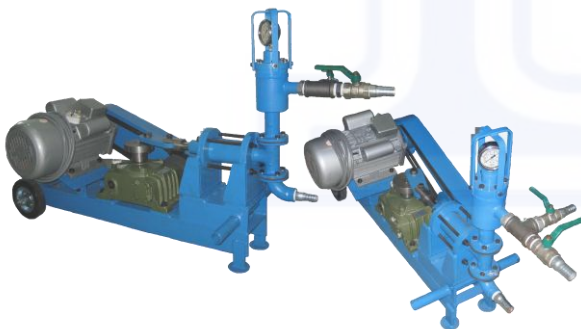

HPM – 8 Motorized Single Acting Piston Pump

Model	HPM – 8 Motorized Single Acting Piston Pump
Piston Diameter	50 mm
Stroke Length	70 mm
No. of Strokes	108 rpm
Discharge Capacity	14 l/min
Working Pressure	15 kg/cm ²
Inlet Diameter	25 mm (1" BSP)
Outlet Diameter	25 mm (1" BSP)/ 20 mm (3/4" BSP)
Power Unit	0.75 kW 230V Single Phase Motor
Weight	Approx. 110kg
Dimensions	1250 mm (L) x 380 mm (W) x 780 mm (H)