




# 优钻地质材料供应有限公司 PRE-MAT DRILLING SUPPLIES PTE LTD

Co Reg. No. 199900213-K GST Reg. No. 19-9900213-K  
 No. 48 Toh Guan Road East #06-107 Enterprise Hub, Singapore 608586  
 Tel: (65) 6861 5323 Fax: (65) 6861 0882 Mobile: (65) 9633 1617 / (65) 9665 2712  
 Email: enquiry@premat.com.sg Website: <http://www.premat.com.sg>

## DOUBLE / TRIPLE TUBE CORE BARRELS (T6 SERIES)

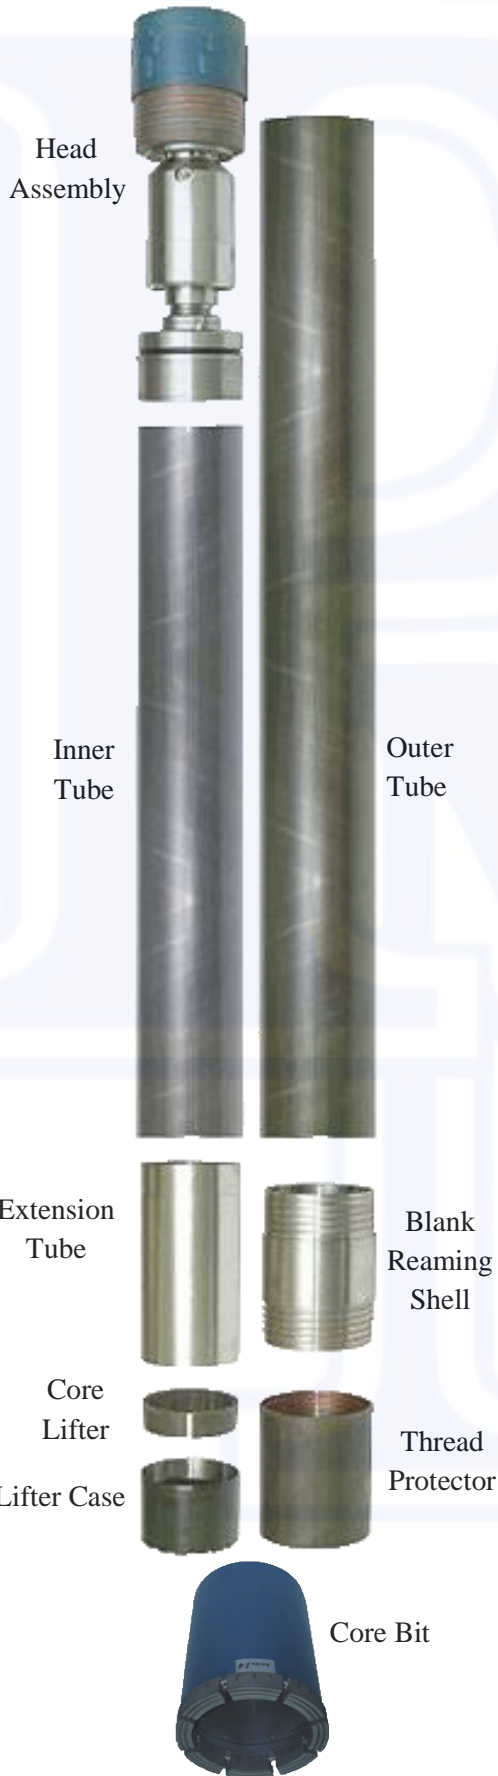

The T6 is a core barrel of sturdy design suitable for coring in all formations. The barrel is used with core bits with a relatively thin kerf to maximize the rate of penetration. T6 barrels can be used with water, mud or air flush, but when using air flush, oversize bits and core barrel couplings are commended (available on request). The barrel is available in four nominal millimeter sizes, 101, 116, 131 and 146, as well as the DCDMA hole size H.

Core Barrel	Hole Diameter (mm)	Core Diameter (mm)	Head Connection
T6-H	99.2	79.0	NW/NWY Rod
T6-101	101.3	79.0	NW/NWY Rod
T6-116	116.3	93.0	NW/NWY Rod
T6-131	131.3	108.0	NW/NWY Rod
T6-131 TT **	131.3	103.0	NW/NWY Rod
T6-146	146.3	123.0	NW/NWY Rod

Core bit not supplied with barrel. T6 Barrels are designed to nest inside metric casing. T6-H barrel can also be used inside HW casing. Standard core lengths is 1.5 meters, other lengths are available on request.

\*\* T6-131 Triple Tubes are formed by inserting either Stainless Steel Split Tube (standard) or Plastic Transparent Liner (on request)

