



优钻地质材料供应有限公司

PRE-MAT DRILLING SUPPLIES PTE LTD


Co Reg. No. 199900213-K GST Reg. No. 19-9900213-K

No. 48 Toh Guan Road East #06-107 Enterprise Hub, Singapore 608586

Tel: (65) 6861 5323 Fax: (65) 6861 0882 Mobile: (65) 9633 1617 / (65) 9665 2712


Email: enquiry@premat.com.sg Website: http://www.premat.com.sg

PVC WELL CASING AND SCREEN

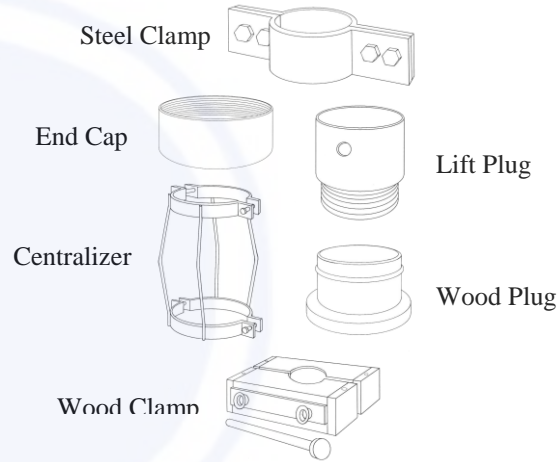


Mechanical Data (General)

Female Ends	All standard lengths have a socket type female threaded end. However, if outside diameter is restricted please contact us for flush type threaded ends. Solvent cement type ends are also available upon request.
Thread Types	Standard threads are shown below. Other types of threads, for example API and BS 879 are available upon request. Coarse threads are also available if required for quicker joint make-up, and in some cases special threads can be provided when extra tensile strength is needed. Please note that 100/4" nominal diameter is also available with 'GAS' type thread. All threads are cleaned, inspected and gauge tested before dispatch and male ends are fitted with a thread cap.

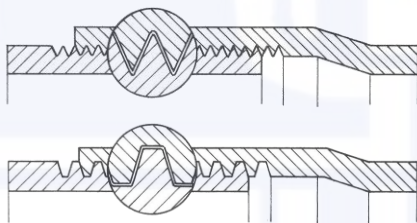


Whitworth
"GAS"
(DIN 2999)
Socket
Trapezoidal
"Din"
(DIN 4925)
Socket

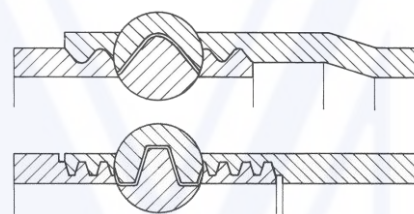

"ROUND"
Socket
Trapezoidal
"DIN"
Flush

Joint Lengths	Quotations are always submitted on price per meter or per length and are based on effective length. 5.80m and 2.90m lengths are standard lengths for container shipment.
----------------------	--

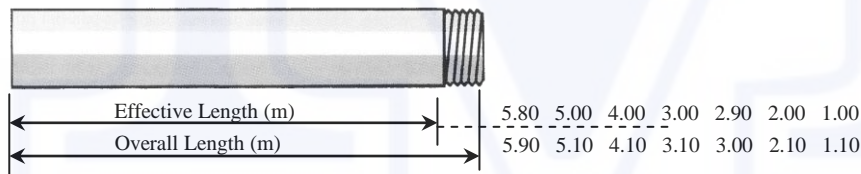

Tolerances	Where applicable, all dimensions comply with DIN 4925.
Special Sizes	Standard sizes are shown in the tables. Non-standard sizes can be manufactured upon request.

