




优钻地质材料供应有限公司
PRE-MAT DRILLING SUPPLIES PTE LTD

Co Reg. No. 199900213-K GST Reg. No. 19-9900213-K
No. 48 Toh Guan Road East #06-107 Enterprise Hub, Singapore 608586
Tel: (65) 6861 5323 Fax: (65) 6861 0882 Mobile: (65) 9633 1617 / (65) 9665 2712
Email: enquiry@premat.com.sg Website: http://www.premat.com.sg

FLUSH JOINT CASING W-SERIES

‘W’ Series Casing

Flush-joint casing has a heavier wall section than the coupled casing and an integral pin and box section. Joint casing makes up flush on both inside and outside diameters. The heavier wall section provides internal and external mating shoulders for the threaded portion to butt against, providing twice the contact area of flush coupled casing and helping to prevent the threads from climbing under heavy torque loads. Standard casing drive shoes and also tungsten carbide insert shoes are generally available ex-stock. Casing clamps for all sizes are readily available. Casing plugs are available for all drill rod connections.

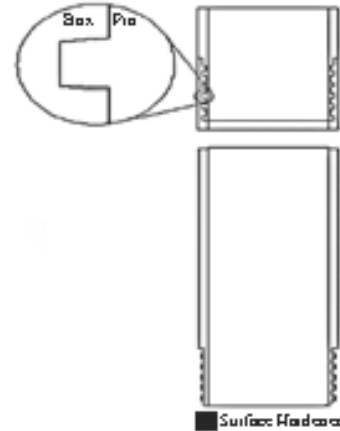

SPECIFICATIONS (DIMENSIONS)

	BW		NW		HW		PW		SW		UW		ZW	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
Casing O.D.	288	73.1	3.5	89.1	4.5	114.5	5.5	140	6.63	168.3	7.63	194.0	8.63	219.0
Casing I.D.	238	60.4	3	76.4	4	101.4	4.88	125.5	5.94	152.3	7.01	178.0	8.00	203.0
Wall Thickness	0.25	6.4	0.25	6.4	0.25	6.4	0.31	79	0.34	8.0	0.31	8.0	0.31	8.0
Threads Per Inch	4		4		4		3		3		3		3	

WEIGHT

Casing Length		BW	NW	HW	PW	SW	UW	ZW
m	ft	kg	kg	Kg	kg	kg	kg	kg
0.5	1.64	495	6.10	8.50	13.50	15.70	18.25	20.65
1.0	3.28	990	12.20	17.00	27.00	31.40	36.50	41.30
1.5	5.00	14.85	18.30	25.50	40.50	47.10	-	-
3.0	10.0	29.70	36.60	51.00	81.00	-	-	-

CASING SHOES

This Casing Shoe is used to drill in flush joint casing. Available in

